



PRODUCT DESCRIPTION

The LED Integrated Tube Light is an all-in-one light with in-built LED driver, designed for easy installation and long interconnected lengths. It can offer up to 60% energy savings over the traditional fluorescent tubes and troffers. These lights can string up to over 40 feet with just one power source and attach via male and female ends on the light fixture. Suitable for office spaces, garages, warehouse aisles, commercial, retail spaces and a variety of other indoor applications.

FEATURES

- Lowers your power consumption by 60%
 - High Efficacy: 130 lm/W-150 lm/W
 - DLC premium listed - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance, helps you get more rebate
 - Brackets for direct ceiling installation
 - Ability to string up to 40 ft. with easy daisy chaining
- method 5 Year Warranty

PERFORMANCE RATINGS AND CERTIFICATIONS

ETL, DLC Premium

PERFORMANCE SUMMARY

Lumens: 4ft.: 3120 - 3600 lumens

8ft.: 7800 - 9000 lumens

Lumens per Watt: 130 - 150 lm/W

CRI-Minimum: ≥80

CCT: Cool White (5000K)

Watts: 4ft.: 24W

8ft.: 60W

Operating Environment: -20°C to 40°C

Optical Distribution: 140° Beam Angle



KIT INFORMATION

Finish: White

Mounting: Ceiling Mount Brackets

Dimensions: 4ft.: 48.00" x 1.30" x 1.38"

8ft.: 96.00" x 1.30" x 1.38"

ELECTRICAL SYSTEM CHARACTERIZATIONS

Voltage: 120 - 277VAC, 50/60 Hz

WARRANTY


5 Year Standard Warranty Limited

ORDERING MATRIX

Example: ST-IG8V1-60W-CW-MT

Family	Product	Color Temp	Voltage
ST	IG4V1-24W = LED Integrated Tube Light 4 ft. 24W IG8V1-60W = LED Integrated Tube Light 8 ft. 60W	CW = Cool White (5000K)	MT = 120-277VAC 50/60 Hz

PRODUCT DIMENSIONS

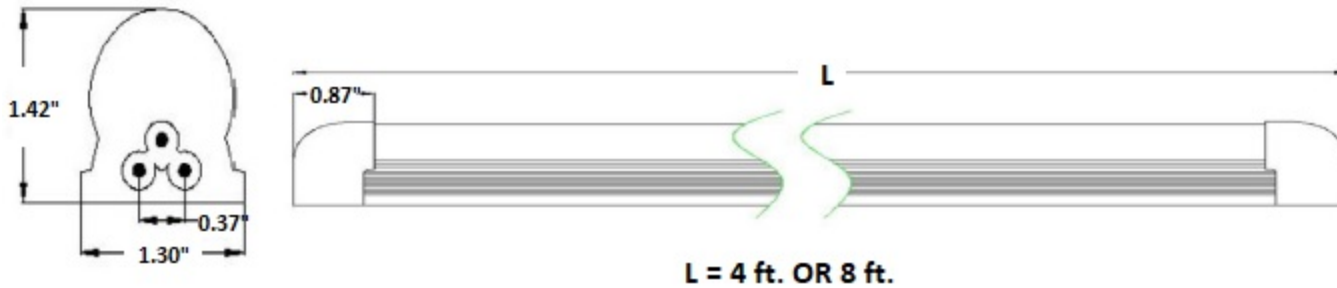

MOUNTING OPTIONS



WIRING DIAGRAM

